


IMPORTANT READ BEFORE OPERATING DRYER


Restricting the dryers exhaust will effect the operation of the dryer. Excessive heat buildup within the chamber may damage the exhaust blower. Proper venting is important.

EC-II SERIES SINGLE & DOUBLE CHAMBER DRYERS


The Exhaust Hood is an option for all Vastex Dryers

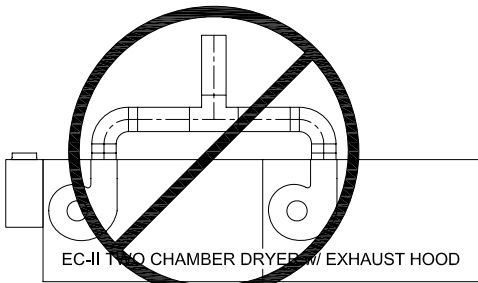


**Exhaust blower damage will result
WRONG**

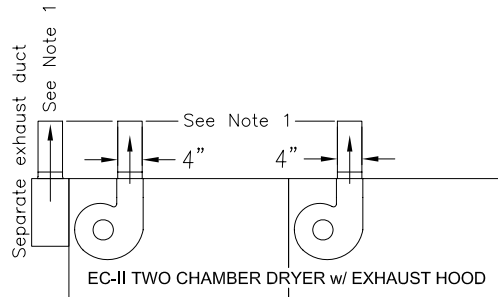


**SEPERATE EXHAUST DUCTS
ACCEPTABLE**

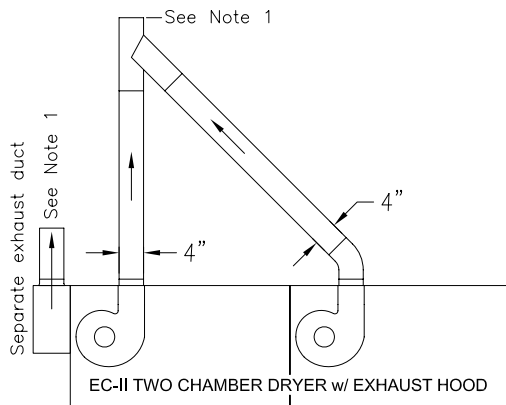

**45° TEE WYE DUCTING
ACCEPTABLE**

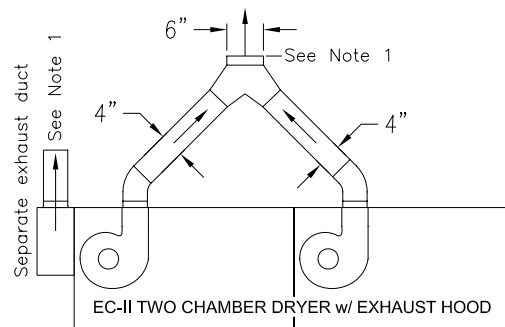


**WYE JOINT DUCTING
ACCEPTABLE**




**45° TEE WYE DUCTING
ACCEPTABLE**

EC-I & DB SERIES DRYERS



**SEPERATE EXHAUST DUCT
ACCEPTABLE**



**45° TEE WYE DUCTING
PREFERRED**

Note:

- 1.) CFM reduction from this point to end of ducting should not exceed 10%. Add auxiliary blower when necessary.
- 2.) Requires exhaust blower when venting dryer outside.


Vastex Dryer & Exhaust Hood Ducting

IMPORTANT READ BEFORE OPERATING DRYER


Restricting the dryers exhaust will effect the operation of the dryer. Excessive heat buildup within the chamber may damage the exhaust blower. Proper venting is important.

BIGRED V SERIES SINGLE & DOUBLE CHAMBER DRYERS


The Exhaust Hood is an option for all Vastex Dryers

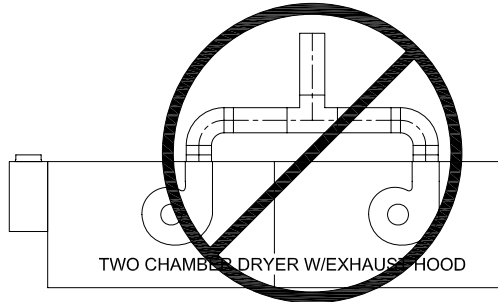


Exhaust blower damage will result
WRONG

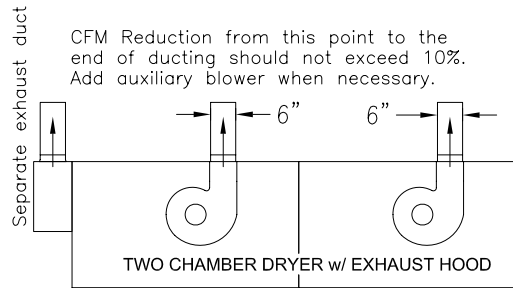


SEPERATE EXHAUST DUCTS
ACCEPTABLE

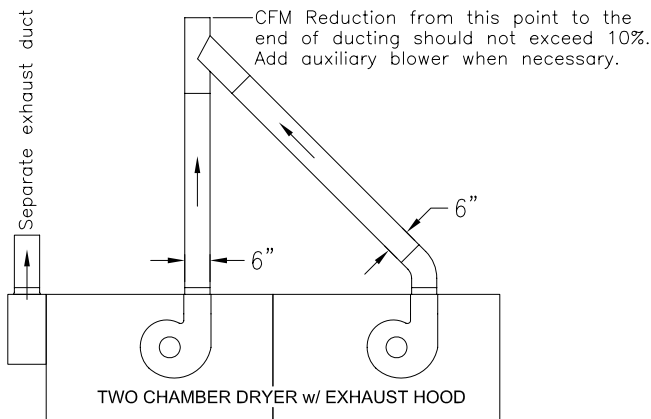

45° TEE WYE DUCTING
Exhaust stack blower is required
ACCEPTABLE

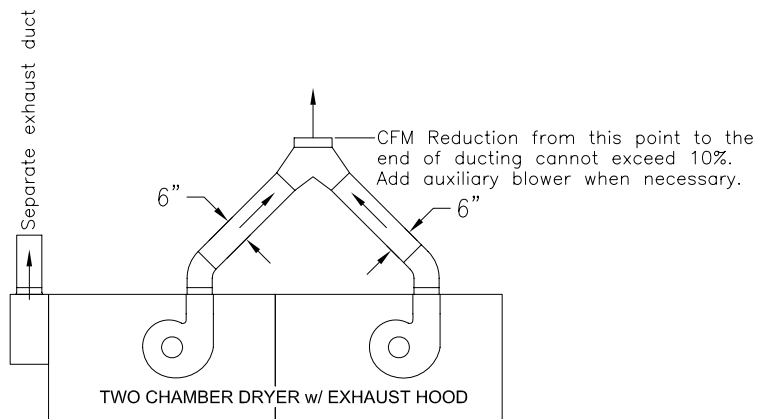

WYE JOINT DUCTING
Exhaust stack blower is required
ACCEPTABLE

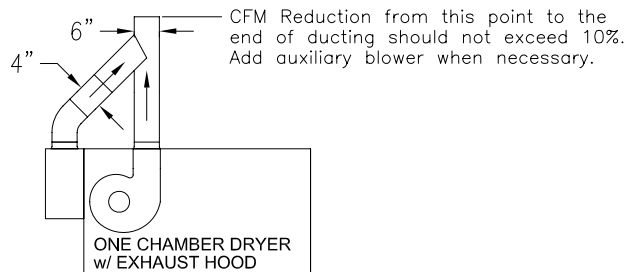

45° TEE WYE DUCTING
ACCEPTABLE